


# CBB11 有感金属箔式聚丙烯膜电容器

Inductive Metallized foil polypropylene film capacitor

## 外形图 Outline Drawing

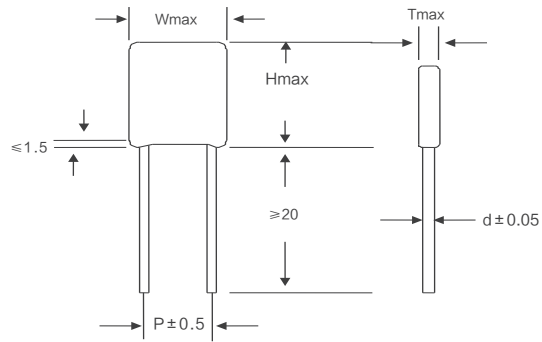

单位 Unit: mm

## 特点 Features

- 电气性能优良，可靠性高
- 环氧树脂封装，聚丙烯材料卷绕
- Better electric property, high reliability
- Epoxy resin coating, constructed with polypropylene

## 主要用途 Typical Applications

- 适用于频率特性高，功率大，耐压高的节能灯电路
- Especially suitable for energy-saving lamps with high frequency, power and high voltage proof

## 技术要求 Specifications

工作温度 Ambient Temperature	-40°C ~ +105°C
容量偏差 Capacitance Tolerance	J: ± 5%; K: ± 10%
耐电压 Voltage Proof	2.5U <sub>R</sub>
损耗角正切 Dissipation Factor	≤ 0.001 (20°C, 1kHz)
绝缘电阻 Insulation Resistance	≥ 5000MΩ (20°C, 100V, 1min)

## ■ 外形尺寸 Dimensions (mm)

电容量 CAP.	100V				630V				1000V			
	W	H	T	P	W	H	T	P	W	H	T	P
682	7.0	11.0	5.0	5.0	9.0	13.5	6.0	6.5	9.0	13.5	6.0	6.5
822	7.2	11.0	5.1	5.0	9.5	13.5	6.5	6.5	9.5	13.5	6.5	6.5
103	7.5	12.0	5.5	5.0	8.5	14.5	7.5	5.0	8.5	14.5	7.5	5.0
103	7.8	12.0	5.0	6.0	9.5	14.5	6.5	6.5	9.5	14.5	6.5	6.5
123	8.0	12.0	5.0	6.0	10.0	14.5	7.0	6.5	10.0	14.5	7.0	6.5

电容量 CAP.	1200V				1500V				1600V			
	W	H	T	P	W	H	T	P	W	H	T	P
471	4.0	11.0	5.0	4.5	7.0	12.0	5.0	4.5	7.0	12.0	5.0	4.5
501	7.0	11.5	5.0	4.5	7.0	12.0	5.0	5.0	7.0	12.0	5.0	5.0
751	7.0	11.5	5.0	4.5	7.0	12.0	5.0	5.0	7.0	12.0	5.0	5.0
681	7.0	11.5	5.0	5.0	7.5	12.0	5.5	5.0	7.5	12.0	5.5	5.0
102	7.5	13.0	4.5	4.5	7.5	13.0	4.5	4.5	7.5	13.0	4.5	4.5
102	7.5	12.0	5.0	5.0	7.5	13.0	5.0	5.0	7.5	13.0	5.0	5.0
152	7.5	13.0	4.5	5.0	8.0	13.0	5.0	5.0	8.0	13.0	5.0	5.0
222	8.0	13.5	5.0	5.0	9.0	15.0	5.5	5.0	9.0	15.0	5.5	5.0
272	8.5	13.5	5.0	5.0	9.0	15.0	5.5	5.0	9.5	14.0	6.0	5.0
302	9.0	13.0	5.0	5.5	9.5	14.0	5.5	5.5	9.5	14.0	5.5	5.5
332	9.0	13.0	5.0	5.0	9.5	15.0	5.5	5.5	10.0	14.0	6.5	5.0
392	9.0	14.0	5.5	5.0	9.0	15.0	6.0	5.5	9.0	15.0	6.0	5.5
402	9.0	14.5	6.0	5.0	10.0	15.5	6.0	5.0	10.0	15.5	6.0	5.0
422	9.0	14.5	6.0	5.0	10.5	15.5	6.5	5.5	10.5	15.5	6.5	5.5
472	9.0	14.5	6.0	5.0	10.5	16.0	6.5	6.5	10.5	14.5	7.0	5.0
562	9.5	15.5	6.0	6.5	11.5	16.0	7.5	6.5	11.5	16.0	7.5	6.5
682	11.0	15.5	6.5	6.5	11.5	16.0	7.0	7.0	11.5	16.0	7.0	7.0
822	11.0	15.5	6.5	6.5	12.0	16.0	7.5	7.0	12.0	16.0	7.5	7.0

注：上表中未包含的产品规格可根据用户要求进行设计和制造

Note: Product specifications not included in this table can be designed and manufactured according to user requirements