


MKP21 金属化聚丙烯膜电容器

Metallized polypropylene film capacitor (Box-type)

外形图 Outline Drawing

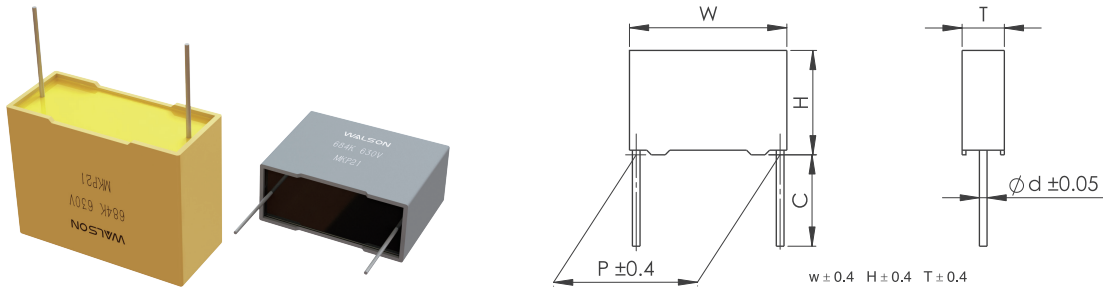

单位 Unit: mm

特点 Features

- 金属化聚丙烯膜
- 高频损耗小
- 内部温升小
- 塑料外壳 (UL94 V-0), 阻燃环氧树脂填充
- Metallized polypropylene film
- Low loss at high frequency
- Small inherent temperature rise
- Plastic case (UL94 V-0), flame retardant epoxy resin sealing

主要用途 Typical Applications

- 广泛应用于高频、直流、交流和脉冲电路中
- 电视机、显示器S校正电路
- Widely used in high frequency, DC, AC and pulse circuits
- S-correction circuits for TV sets and monitors

技术要求 Specifications

引用标准 Reference Standard	GB/T 10190 (IEC 60384-16)						
气候类别 Climatic Category	40/105/56						
额定温度 Rated Temperature	105℃						
工作温度范围 Operating Temperature Range	-40℃~105℃						
额定电压 Rated Voltage	160Vdc (90Vac), 250Vdc (160Vac), 400Vdc (220Vac), 630Vdc (250Vac) 1000Vdc (400Vac), 1600Vdc (600Vac), 2000Vdc (700Vac)						
电容量范围 Capacitance Range	0.00056 μF ~ 15.0 μF						
电容量偏差 Capacitance Tolerance	±2% (G), ±3% (H), ±5% (J), ±10% (K), ±20% (M)						
耐电压 Voltage Proof	1.6U _R (5s)						
损耗角正切 Dissipation Factor	≤ 10 × 10 ⁻⁴ (1kHz, 20℃)						
绝缘电阻 Insulation Resistance	R ≥ 15000MΩ, C _N ≤ 0.33 μF RC _N ≥ 5000s, C _N > 0.33 μF (20℃, 100V, 1min)						
最大脉冲爬升速率 Maximum Pulse Rise Time (dV/dt): 若实际工作电压U比额定电压U _R 低, 电容器可工作在更高的dV/dt场合, 这样dV/dt允许值应为右表值乘以U _R /U。 If the working voltage (U) is lower than the rated voltage (U _R), the capacitor can be worked at a higher dV/dt. In this case, the maximum allowed dV/dt is obtain by multiplying the right value with U _R /U.	U _R (V)	dV/dt (V/μs)					
			P=5.0	P=7.5	P=10.0	P=15.0	P=22.5
	160	110	310	190	110	65	55
	250	270	660	560	310	130	110
	400	440	900	780	600	300	130
	630	550	1500	1200	900	400	200
	1000	--	--	2200	2000	800	--
	1600	--	--	--	4500	1800	--
2000	--	--	--	9500	4500	--	

■ 外形尺寸 Dimensions (mm)

160Vdc (90Vac)					
C _N (μF)	W	H	T	P	d
0.027	7.2	7.5	3.5	5.0	0.5
0.033	7.2	7.5	3.5	5.0	0.5
0.039	7.2	7.5	3.5	5.0	0.5
0.047	7.2	9.5	4.5	5.0	0.6
0.056	7.2	9.5	4.5	5.0	0.6
0.068	7.2	9.5	4.5	5.0	0.6
0.082	7.2	10.0	5.0	5.0	0.6
0.10	7.2	10.0	5.0	5.0	0.6
0.12	7.2	11.0	6.0	5.0	0.6
0.15	7.2	11.0	6.0	5.0	0.6
0.068	10.5	9.0	4.0	7.5	0.6
0.082	10.5	9.0	4.0	7.5	0.6
0.10	10.5	11.0	5.0	7.5	0.6
0.12	10.5	11.0	5.0	7.5	0.6
0.15	10.5	12.0	6.0	7.5	0.6
0.18	10.5	12.0	6.0	7.5	0.6
0.082	13.0	9.0	4.0	10.0	0.6
0.10	13.0	9.0	4.0	10.0	0.6
0.12	13.0	11.0	5.0	10.0	0.6
0.15	13.0	11.0	5.0	10.0	0.6
0.18	13.0	11.0	5.0	10.0	0.6
0.22	13.0	12.0	6.0	10.0	0.6
0.27	13.0	12.0	6.0	10.0	0.6
0.18	17.5	11.0	5.0	15.0	0.8
0.22	17.5	11.0	5.0	15.0	0.8
0.27	17.5	11.0	5.0	15.0	0.8
0.33	17.5	11.0	5.0	15.0	0.8
0.39	17.5	12.0	6.0	15.0	0.8
0.47	17.5	12.0	6.0	15.0	0.8
0.56	17.5	13.5	7.5	15.0	0.8
0.68	17.5	13.5	7.5	15.0	0.8

160Vdc (90Vac)					
C _N (μF)	W	H	T	P	d
0.82	17.5	14.5	8.5	15.0	0.8
1.0	17.5	16.0	10.0	15.0	0.8
1.2	17.5	16.0	10.0	15.0	0.8
1.5	17.5	19.0	11.0	15.0	0.8
1.8	17.5	19.0	11.0	15.0	0.8
0.47	26.5	15.0	6.0	22.5	0.8
0.56	26.5	15.0	6.0	22.5	0.8
0.68	26.5	15.0	6.0	22.5	0.8
0.82	26.5	16.0	7.0	22.5	0.8
1.0	26.5	16.0	7.0	22.5	0.8
1.2	26.5	17.0	8.5	22.5	0.8
1.5	26.5	17.0	8.5	22.5	0.8
1.8	26.5	18.5	10.0	22.5	0.8
2.2	26.5	20.0	11.0	22.5	0.8
2.7	26.5	22.0	12.0	22.5	0.8
3.3	26.5	22.0	12.0	22.5	0.8
1.0	32.0	18.0	9.0	27.5	0.8
1.2	32.0	18.0	9.0	27.5	0.8
1.5	32.0	18.0	9.0	27.5	0.8
1.8	32.0	18.0	9.0	27.5	0.8
2.2	32.0	18.0	9.0	27.5	0.8
2.7	32.0	20.0	11.0	27.5	0.8
3.3	32.0	20.0	11.0	27.5	0.8
3.9	32.0	22.0	13.0	27.5	0.8
4.7	32.0	28.0	14.0	27.5	0.8
5.6	32.0	24.5	15.0	27.5	0.8
6.8	32.0	33.0	18.0	27.5	0.8
8.2	32.0	33.0	18.0	27.5	0.8
10.0	32.0	33.0	18.0	27.5	0.8
12.0	32.0	37.0	22.0	27.5	0.8
15.0	32.0	37.0	22.0	27.5	0.8

250Vdc (160Vac)					
C _N (μF)	W	H	T	P	d
0.012	7.2	7.5	3.5	5.0	0.5
0.015	7.2	7.5	3.5	5.0	0.5
0.018	7.2	7.5	3.5	5.0	0.5
0.022	7.2	7.5	3.5	5.0	0.5
0.027	7.2	7.5	3.5	5.0	0.5
0.033	7.2	7.5	3.5	5.0	0.5
0.039	7.2	7.5	3.5	5.0	0.5
0.047	7.2	9.5	4.5	5.0	0.6
0.056	7.2	9.5	4.5	5.0	0.6
0.068	7.2	10.0	5.0	5.0	0.6
0.082	7.2	10.0	5.0	5.0	0.6
0.10	7.2	11.0	6.0	5.0	0.6
0.12	7.2	11.0	6.0	5.0	0.6
0.027	10.5	9.0	4.0	7.5	0.6
0.033	10.5	9.0	4.0	7.5	0.6
0.039	10.5	9.0	4.0	7.5	0.6
0.047	10.5	9.0	4.0	7.5	0.6
0.056	10.5	9.0	4.0	7.5	0.6
0.068	10.5	9.0	4.0	7.5	0.6
0.082	10.5	11.0	5.0	7.5	0.6
0.10	10.5	11.0	5.0	7.5	0.6
0.12	10.5	11.0	5.0	7.5	0.6
0.15	10.5	12.0	6.0	7.5	0.6
0.18	10.5	12.0	6.0	7.5	0.6
0.033	13.0	9.0	4.0	10.0	0.6
0.039	13.0	9.0	4.0	10.0	0.6
0.047	13.0	9.0	4.0	10.0	0.6
0.056	13.0	9.0	4.0	10.0	0.6
0.068	13.0	9.0	4.0	10.0	0.6
0.082	13.0	9.0	4.0	10.0	0.6
0.10	13.0	11.0	5.0	10.0	0.6
0.12	13.0	11.0	5.0	10.0	0.6
0.15	13.0	11.0	5.0	10.0	0.6
0.18	13.0	12.0	6.0	10.0	0.6
0.22	13.0	12.0	6.0	10.0	0.6
0.10	17.5	11.0	5.0	15.0	0.8
0.12	17.5	11.0	5.0	15.0	0.8
0.15	17.5	11.0	5.0	15.0	0.8

■ 外形尺寸 Dimensions (mm)

250Vdc (160Vac)					
C _N (μF)	W	H	T	P	d
0.18	17.5	11.0	5.0	15.0	0.8
0.22	17.5	11.0	5.0	15.0	0.8
0.27	17.5	12.0	6.0	15.0	0.8
0.33	17.5	12.0	6.0	15.0	0.8
0.39	17.5	13.5	7.5	15.0	0.8
0.47	17.5	13.5	7.5	15.0	0.8
0.56	17.5	13.5	7.5	15.0	0.8
0.68	17.5	14.5	8.5	15.0	0.8
0.82	17.5	16.0	10.0	15.0	0.8
1.0	17.5	16.0	10.0	15.0	0.8
1.2	17.5	19.0	11.0	15.0	0.8
0.39	26.5	15.0	6.0	22.5	0.8
0.47	26.5	15.0	6.0	22.5	0.8
0.56	26.5	15.0	6.0	22.5	0.8
0.68	26.5	15.0	6.0	22.5	0.8
0.82	26.5	15.0	6.0	22.5	0.8
1.0	26.5	16.0	7.0	22.5	0.8
1.2	26.5	17.0	8.5	22.5	0.8
1.5	26.5	17.0	8.5	22.5	0.8
1.8	26.5	18.5	10.0	22.5	0.8
2.2	26.5	20.0	11.0	22.5	0.8
2.7	26.5	22.0	12.0	22.5	0.8
0.82	32.0	18.0	9.0	27.5	0.8
1.0	32.0	18.0	9.0	27.5	0.8
1.2	32.0	18.0	9.0	27.5	0.8
1.5	32.0	18.0	9.0	27.5	0.8
1.8	32.0	18.0	9.0	27.5	0.8
2.2	32.0	18.0	9.0	27.5	0.8
2.7	32.0	20.0	11.0	27.5	0.8
3.3	32.0	20.0	11.0	27.5	0.8
3.9	32.0	22.0	13.0	27.5	0.8
4.7	32.0	28.0	14.0	27.5	0.8
5.6	32.0	24.5	15.0	27.5	0.8
6.8	32.0	33.0	18.0	27.5	0.8
8.2	32.0	33.0	18.0	27.5	0.8
10.0	32.0	33.0	18.0	27.5	0.8
12.0	32.0	37.0	22.0	27.5	0.8
15.0	32.0	37.0	22.0	27.5	0.8

400Vdc (220Vac)					
C _N (μF)	W	H	T	P	d
0.0039	7.2	7.5	3.5	5.0	0.5
0.0047	7.2	7.5	3.5	5.0	0.5
0.0056	7.2	7.5	3.5	5.0	0.5
0.0068	7.2	7.5	3.5	5.0	0.5
0.0082	7.2	7.5	3.5	5.0	0.5
0.010	7.2	7.5	3.5	5.0	0.5
0.012	7.2	7.5	3.5	5.0	0.5
0.015	7.2	9.5	4.5	5.0	0.6
0.018	7.2	9.5	4.5	5.0	0.6
0.022	7.2	9.5	4.5	5.0	0.6
0.027	7.2	10.0	5.0	5.0	0.6
0.033	7.2	11.0	6.0	5.0	0.6
0.039	7.2	11.0	6.0	5.0	0.6
0.047	7.2	11.0	6.0	5.0	0.6
0.010	10.5	9.0	4.0	7.5	0.6
0.012	10.5	9.0	4.0	7.5	0.6
0.015	10.5	9.0	4.0	7.5	0.6
0.018	10.5	9.0	4.0	7.5	0.6
0.022	10.5	9.0	4.0	7.5	0.6
0.027	10.5	9.0	4.0	7.5	0.6
0.033	10.5	11.0	5.0	7.5	0.6
0.039	10.5	11.0	5.0	7.5	0.6
0.047	10.5	11.0	5.0	7.5	0.6
0.056	10.5	12.0	6.0	7.5	0.6
0.068	10.5	12.0	6.0	7.5	0.6
0.015	13.0	9.0	4.0	10.0	0.6
0.018	13.0	9.0	4.0	10.0	0.6
0.022	13.0	9.0	4.0	10.0	0.6
0.027	13.0	9.0	4.0	10.0	0.6
0.033	13.0	9.0	4.0	10.0	0.6
0.039	13.0	9.0	4.0	10.0	0.6
0.047	13.0	11.0	5.0	10.0	0.6
0.056	13.0	11.0	5.0	10.0	0.6
0.068	13.0	11.0	5.0	10.0	0.6
0.082	13.0	12.0	6.0	10.0	0.6
0.10	13.0	12.0	6.0	10.0	0.6
0.068	17.5	11.0	5.0	15.0	0.8
0.082	17.5	11.0	5.0	15.0	0.8

400Vdc (220Vac)					
C _N (μF)	W	H	T	P	d
0.10	17.5	11.0	5.0	15.0	0.8
0.12	17.5	11.0	5.0	15.0	0.8
0.15	17.5	12.0	6.0	15.0	0.8
0.18	17.5	12.0	6.0	15.0	0.8
0.22	17.5	13.5	7.5	15.0	0.8
0.27	17.5	13.5	7.5	15.0	0.8
0.33	17.5	14.5	8.5	15.0	0.8
0.39	17.5	16.0	10.0	15.0	0.8
0.47	17.5	16.0	10.0	15.0	0.8
0.56	17.5	19.0	11.0	15.0	0.8
0.68	17.5	19.0	11.0	15.0	0.8
0.18	26.5	15.0	6.0	22.5	0.8
0.22	26.5	15.0	6.0	22.5	0.8
0.27	26.5	15.0	6.0	22.5	0.8
0.33	26.5	15.0	6.0	22.5	0.8
0.39	26.5	16.0	7.0	22.5	0.8
0.47	26.5	16.0	7.0	22.5	0.8
0.56	26.5	17.0	8.5	22.5	0.8
0.68	26.5	17.0	8.5	22.5	0.8
0.82	26.5	18.5	10.0	22.5	0.8
1.0	26.5	20.0	11.0	22.5	0.8
1.2	26.5	22.0	12.0	22.5	0.8
1.5	26.5	22.0	12.0	22.5	0.8
0.56	32.0	18.0	9.0	27.5	0.8
0.68	32.0	18.0	9.0	27.5	0.8
0.82	32.0	18.0	9.0	27.5	0.8
1.0	32.0	18.0	9.0	27.5	0.8
1.2	32.0	20.0	11.0	27.5	0.8
1.5	32.0	20.0	11.0	27.5	0.8
1.8	32.0	22.0	13.0	27.5	0.8
2.2	32.0	24.5	15.0	27.5	0.8
2.7	32.0	28.0	14.0	27.5	0.8
3.3	32.0	33.0	18.0	27.5	0.8
3.9	32.0	33.0	18.0	27.5	0.8
4.7	32.0	37.0	22.0	27.5	0.8
5.6	32.0	37.0	22.0	27.5	0.8

■ 外形尺寸 Dimensions (mm)

630Vdc (250Vac)					
C _N (μF)	W	H	T	P	d
0.0010	7.2	7.5	3.5	5.0	0.5
0.0012	7.2	7.5	3.5	5.0	0.5
0.0015	7.2	7.5	3.5	5.0	0.5
0.0018	7.2	7.5	3.5	5.0	0.5
0.0022	7.2	7.5	3.5	5.0	0.5
0.0027	7.2	7.5	3.5	5.0	0.5
0.0033	7.2	7.5	3.5	5.0	0.5
0.0039	7.2	9.5	4.5	5.0	0.6
0.0047	7.2	9.5	4.5	5.0	0.6
0.0056	7.2	10.0	5.0	5.0	0.6
0.0068	7.2	10.0	5.0	5.0	0.6
0.0082	7.2	11.0	6.0	5.0	0.6
0.010	7.2	11.0	6.0	5.0	0.6
0.012	7.2	11.0	6.0	5.0	0.6
0.0010	10.5	9.0	4.0	7.5	0.6
0.0012	10.5	9.0	4.0	7.5	0.6
0.0015	10.5	9.0	4.0	7.5	0.6
0.0018	10.5	9.0	4.0	7.5	0.6
0.0022	10.5	9.0	4.0	7.5	0.6
0.0027	10.5	9.0	4.0	7.5	0.6
0.0033	10.5	9.0	4.0	7.5	0.6
0.0039	10.5	9.0	4.0	7.5	0.6
0.0047	10.5	9.0	4.0	7.5	0.6
0.0056	10.5	9.0	4.0	7.5	0.6
0.0068	10.5	9.0	4.0	7.5	0.6
0.0082	10.5	9.0	4.0	7.5	0.6
0.010	10.5	9.0	4.0	7.5	0.6
0.012	10.5	9.0	4.0	7.5	0.6
0.015	10.5	11.0	5.0	7.5	0.6
0.018	10.5	11.0	5.0	7.5	0.6
0.022	10.5	11.0	5.0	7.5	0.6

630Vdc (250Vac)					
C _N (μF)	W	H	T	P	d
0.027	10.5	12.0	6.0	7.5	0.6
0.033	10.5	12.0	6.0	7.5	0.6
0.0010	13.0	9.0	4.0	10.0	0.6
0.0012	13.0	9.0	4.0	10.0	0.6
0.0015	13.0	9.0	4.0	10.0	0.6
0.0018	13.0	9.0	4.0	10.0	0.6
0.0022	13.0	9.0	4.0	10.0	0.6
0.0027	13.0	9.0	4.0	10.0	0.6
0.0033	13.0	9.0	4.0	10.0	0.6
0.0039	13.0	9.0	4.0	10.0	0.6
0.0047	13.0	9.0	4.0	10.0	0.6
0.0056	13.0	9.0	4.0	10.0	0.6
0.0068	13.0	9.0	4.0	10.0	0.6
0.0082	13.0	9.0	4.0	10.0	0.6
0.010	13.0	9.0	4.0	10.0	0.6
0.012	13.0	9.0	4.0	10.0	0.6
0.015	13.0	9.0	4.0	10.0	0.6
0.018	13.0	9.0	4.0	10.0	0.6
0.022	13.0	11.0	5.0	10.0	0.6
0.027	13.0	11.0	5.0	10.0	0.6
0.033	13.0	11.0	5.0	10.0	0.6
0.039	13.0	12.0	6.0	10.0	0.6
0.047	13.0	12.0	6.0	10.0	0.6
0.027	17.5	11.0	5.0	15.0	0.8
0.033	17.5	11.0	5.0	15.0	0.8
0.039	17.5	11.0	5.0	15.0	0.8
0.047	17.5	11.0	5.0	15.0	0.8
0.056	17.5	11.0	5.0	15.0	0.8
0.068	17.5	12.0	6.0	15.0	0.8
0.082	17.5	12.0	6.0	15.0	0.8
0.10	17.5	13.5	7.5	15.0	0.8

630Vdc (250Vac)					
C _N (μF)	W	H	T	P	d
0.12	17.5	13.5	7.5	15.0	0.8
0.15	17.5	13.5	7.5	15.0	0.8
0.18	17.5	14.5	8.5	15.0	0.8
0.22	17.5	16.0	10.0	15.0	0.8
0.27	17.5	19.0	11.0	15.0	0.8
0.33	17.5	19.0	11.0	15.0	0.8
0.082	26.5	15.0	6.0	22.5	0.8
0.10	26.5	15.0	6.0	22.5	0.8
0.12	26.5	15.0	6.0	22.5	0.8
0.15	26.5	15.0	6.0	22.5	0.8
0.18	26.5	15.0	6.0	22.5	0.8
0.22	26.5	16.0	7.0	22.5	0.8
0.27	26.5	17.0	8.5	22.5	0.8
0.33	26.5	17.0	8.5	22.5	0.8
0.39	26.5	18.5	10.0	22.5	0.8
0.47	26.5	18.5	10.0	22.5	0.8
0.56	26.5	20.0	11.0	22.5	0.8
0.68	26.5	22.0	12.0	22.5	0.8
0.33	32.0	18.0	9.0	27.5	0.8
0.39	32.0	18.0	9.0	27.5	0.8
0.47	32.0	18.0	9.0	27.5	0.8
0.56	32.0	20.0	11.0	27.5	0.8
0.68	32.0	20.0	11.0	27.5	0.8
0.82	32.0	20.0	11.0	27.5	0.8
1.0	32.0	22.0	13.0	27.5	0.8
1.2	32.0	24.5	15.0	27.5	0.8
1.5	32.0	28.0	14.0	27.5	0.8
1.8	32.0	33.0	18.0	27.5	0.8
2.2	32.0	33.0	18.0	27.5	0.8
2.7	32.0	37.0	22.0	27.5	0.8
3.3	32.0	37.0	22.0	27.5	0.8

■ 外形尺寸 Dimensions (mm)

1000Vdc (400Vac)					
C _N (μF)	W	H	T	P	d
0.0010	13.0	9.0	4.0	10.0	0.6
0.0012	13.0	9.0	4.0	10.0	0.6
0.0015	13.0	9.0	4.0	10.0	0.6
0.0018	13.0	9.0	4.0	10.0	0.6
0.0022	13.0	9.0	4.0	10.0	0.6
0.0027	13.0	9.0	4.0	10.0	0.6
0.0033	13.0	9.0	4.0	10.0	0.6
0.0039	13.0	9.0	4.0	10.0	0.6
0.0047	13.0	11.0	5.0	10.0	0.6
0.0056	13.0	11.0	5.0	10.0	0.6
0.0068	13.0	11.0	5.0	10.0	0.6
0.0082	13.0	12.0	6.0	10.0	0.6
0.010	13.0	12.0	6.0	10.0	0.6
0.0022	17.5	11.0	5.0	15.0	0.8
0.0027	17.5	11.0	5.0	15.0	0.8
0.0033	17.5	11.0	5.0	15.0	0.8
0.0039	17.5	11.0	5.0	15.0	0.8
0.0047	17.5	11.0	5.0	15.0	0.8
0.0056	17.5	11.0	5.0	15.0	0.8
0.0068	17.5	11.0	5.0	15.0	0.8
0.0082	17.5	11.0	5.0	15.0	0.8
0.010	17.5	11.0	5.0	15.0	0.8
0.012	17.5	11.0	5.0	15.0	0.8
0.015	17.5	12.0	6.0	15.0	0.8
0.018	17.5	12.0	6.0	15.0	0.8
0.022	17.5	13.5	7.5	15.0	0.8
0.027	17.5	13.5	7.5	15.0	0.8
0.033	17.5	14.5	8.5	15.0	0.8
0.039	17.5	16.0	10.0	15.0	0.8
0.047	17.5	16.0	10.0	15.0	0.8
0.056	17.5	19.0	11.0	15.0	0.8
0.068	17.5	19.0	11.0	15.0	0.8
0.018	26.5	15.0	6.0	22.5	0.8
0.022	26.5	15.0	6.0	22.5	0.8
0.027	26.5	15.0	6.0	22.5	0.8
0.033	26.5	15.0	6.0	22.5	0.8
0.039	26.5	15.0	6.0	22.5	0.8
0.047	26.5	16.0	7.0	22.5	0.8
0.056	26.5	16.0	7.0	22.5	0.8
0.068	26.5	17.0	8.5	22.5	0.8
0.082	26.5	17.0	8.5	22.5	0.8
0.10	26.5	18.5	10.0	22.5	0.8
0.12	26.5	22.0	12.0	22.5	0.8
0.15	26.5	22.0	12.0	22.5	0.8

1600Vdc (600Vac)					
C _N (μF)	W	H	T	P	d
0.00056	17.5	11.0	5.0	15.0	0.8
0.00062	17.5	11.0	5.0	15.0	0.8
0.00068	17.5	11.0	5.0	15.0	0.8
0.00082	17.5	11.0	5.0	15.0	0.8
0.0010	17.5	11.0	5.0	15.0	0.8
0.0012	17.5	11.0	5.0	15.0	0.8
0.0015	17.5	11.0	5.0	15.0	0.8
0.0018	17.5	11.0	5.0	15.0	0.8
0.0022	17.5	11.0	5.0	15.0	0.8
0.0027	17.5	11.0	5.0	15.0	0.8
0.0033	17.5	11.0	5.0	15.0	0.8
0.0039	17.5	11.0	5.0	15.0	0.8
0.0047	17.5	11.0	5.0	15.0	0.8
0.0056	17.5	11.0	5.0	15.0	0.8
0.0068	17.5	11.0	5.0	15.0	0.8
0.0082	17.5	12.0	6.0	15.0	0.8
0.010	17.5	12.0	6.0	15.0	0.8
0.012	17.5	12.0	6.0	15.0	0.8
0.015	17.5	13.5	7.5	15.0	0.8
0.018	17.5	13.5	7.5	15.0	0.8
0.022	17.5	14.5	8.5	15.0	0.8
0.027	17.5	16.0	10.0	15.0	0.8
0.033	17.5	16.0	10.0	15.0	0.8
0.039	17.5	19.0	11.0	15.0	0.8
0.047	17.5	19.0	11.0	15.0	0.8
0.015	26.5	15.0	6.0	22.5	0.8
0.018	26.5	15.0	6.0	22.5	0.8
0.022	26.5	15.0	6.0	22.5	0.8
0.027	26.5	16.0	7.0	22.5	0.8
0.033	26.5	16.0	7.0	22.5	0.8
0.039	26.5	17.0	8.5	22.5	0.8
0.047	26.5	18.5	10.0	22.5	0.8
0.056	26.5	18.5	10.0	22.5	0.8
0.068	26.5	22.0	12.0	22.5	0.8
0.082	26.5	22.0	12.0	22.5	0.8
0.10	26.5	22.0	12.0	22.5	0.8

2000Vdc (700Vac)					
C _N (μF)	W	H	T	P	d
0.00056	17.5	11.0	5.0	15.0	0.8
0.00062	17.5	11.0	5.0	15.0	0.8
0.00068	17.5	11.0	5.0	15.0	0.8
0.00082	17.5	11.0	5.0	15.0	0.8
0.0010	17.5	11.0	5.0	15.0	0.8
0.0012	17.5	11.0	5.0	15.0	0.8
0.0015	17.5	11.0	5.0	15.0	0.8
0.0018	17.5	11.0	5.0	15.0	0.8
0.0022	17.5	11.0	5.0	15.0	0.8
0.0027	17.5	11.0	5.0	15.0	0.8
0.0033	17.5	11.0	5.0	15.0	0.8
0.0039	17.5	11.0	5.0	15.0	0.8
0.0047	17.5	11.0	5.0	15.0	0.8
0.0056	17.5	12.0	6.0	15.0	0.8
0.0068	17.5	12.0	6.0	15.0	0.8
0.0082	17.5	13.5	7.5	15.0	0.8
0.010	17.5	13.5	7.5	15.0	0.8
0.012	17.5	14.5	8.5	15.0	0.8
0.015	17.5	14.5	8.5	15.0	0.8
0.018	17.5	16.0	10.0	15.0	0.8
0.022	17.5	19.0	11.0	15.0	0.8
0.0068	26.5	15.0	6.0	22.5	0.8
0.0082	26.5	15.0	6.0	22.5	0.8
0.010	26.5	15.0	6.0	22.5	0.8
0.012	26.5	15.0	6.0	22.5	0.8
0.015	26.5	15.0	6.0	22.5	0.8
0.018	26.5	16.0	7.0	22.5	0.8
0.022	26.5	17.0	8.5	22.5	0.8
0.027	26.5	17.0	8.5	22.5	0.8
0.033	26.5	18.5	10.0	22.5	0.8
0.039	26.5	18.5	10.0	22.5	0.8
0.047	26.5	22.0	12.0	22.5	0.8
0.056	26.5	22.0	12.0	22.5	0.8

注：上表中未包含的产品规格可根据用户要求进行设计和制造

Note: Product specifications not included in this table can be designed and manufactured according to user requirements